

2 Humbuckers, 4 Conductor - 1 Volume Pot With Push Pull Tone Pot Wired For Coil Split & 3 Way Blade Switch

Key





Solder joint



Ground connection.
Usually soldered to rear of volume pot

Close up of switch tags-

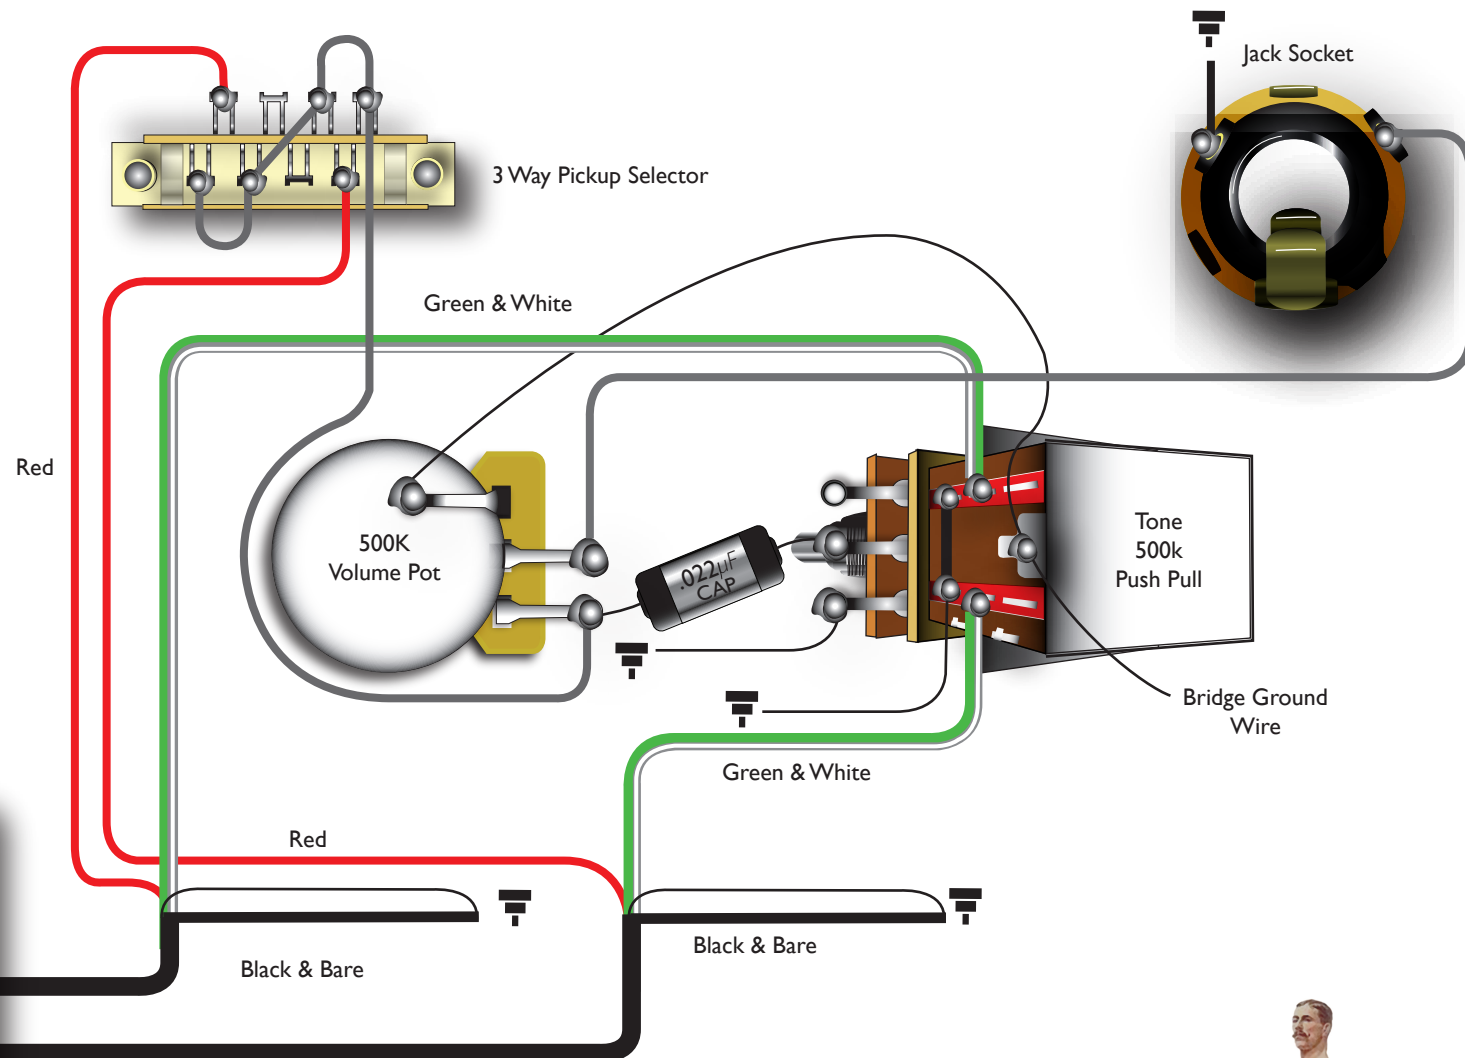
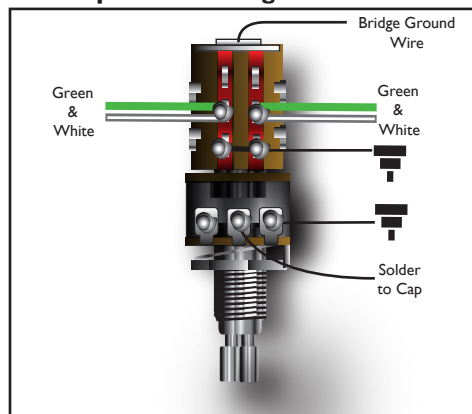


Push Pull Positions-

1. Switch pulled out: slug coil only
2. Switch pushed in: both coils in series (standard humbucking operation)

3 Way Switch Positions-

1. Bridge
2. Bridge & Neck in Parallel
3. Neck

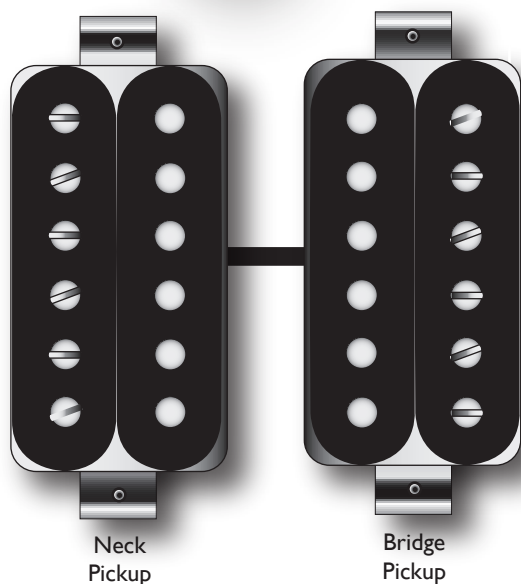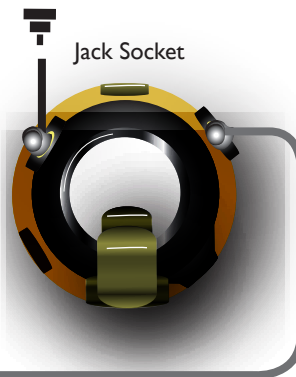

Bare Knuckle
PICKUPS